




Step Accuracy-----±5%
 Temperature Rise-----80°C Max.
 Ambient Temperature Range-----20°C~+50°C
 Insulation Resistance-----100MΩ Min.50V DC
 Dielectric Strength-----500V AC 1minute

电机型号 Model	步距角 Step angel (°)	机身長 Motor Length L (mm)	相电压 Rate Voltage (V)	相电流 Rate Current (A)	相电阻 Phase Resistance (Ω)	相电感 Phase Inductance (mH)	静力矩 Holding Torque (g.cm)	引线 数 Lead Wire (NO.)	转动惯 性 Rotor Inertia (g. c m ²)	重量 Motor Weight (kg)
28BYGH102	1.8	32	3.8	0.67	5.6	3.4	600	4	9	0.11
28BYGH105	1.8	32	2.66	0.95	2.8	0.8	430	6	9	0.11
28BYGH301	1.8	45	4.56	0.67	6.8	4.9	950	4	12	0.14
28BYGH303	1.8	45	3.4	0.95	3.4	1.2	750	6	12	0.14
28BYGH501	1.8	51	6.2	0.67	9.2	7.2	1200	4	18	0.2
28BYGH502	1.8	51	4.4	0.95	4.6	1.8	900	6	18	0.2

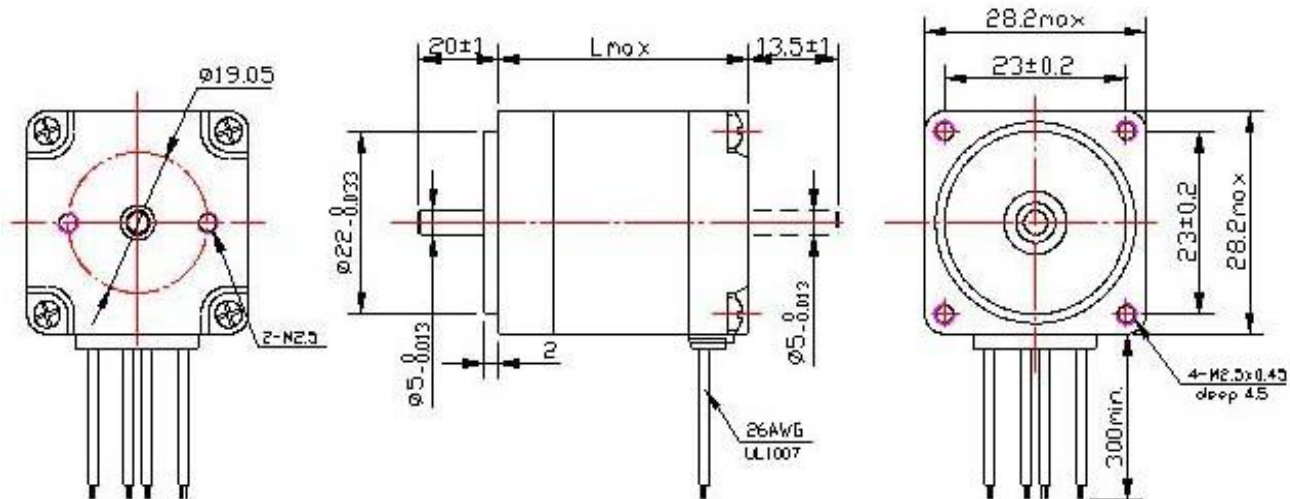

Wiring Diagram (接线图)

