



Step Accuracy-----±5%
 Temperature Rise-----80°C Max.
 Ambient Temperature Range-----20°C ~+50°C
 Insulation Resistance-----100MΩ Min. 50V DC
 Dielectric Strength-----500V AC 1minute

电机型号 Model	步距角 Step angel (°)	机身长 Motor Length L (mm)	相电压 Rate Voltage (V)	相电流 Rate Current (A)	相电阻 Phase Resistance (Ω)	相电感 Phase Inductance (mH)	静力矩 Holding Torque (g. cm)	引线数 Lead Wire (NO.)	转动惯量 Rotor Inertia (g. cm ²)	定位力矩 Detent Torque (g. cm)	重量 Motor Weight (kg)
39BYG003	1.8	20	12	0.48	25	22	1000	4	11	50	0.12
39BYG013	1.8	20	6.5	0.4	6.8	6.5	550	4	11	50	0.12
39BYG104	1.8	26	6.3	0.42	15	8.5	800	6	13	70	0.14
39BYG301	1.8	31	4.5	0.5	9	3.5	1000	6	18	100	0.16
39BYG215	1.8	34	12	0.4	30	42	2100	4	20	120	0.18
39BYG221	1.8	34	5	1	5	3	1800	4	20	120	0.18
39BYG404	1.8	38	6	0.8	7.5	7	2000	6	24	180	0.2
39BYG408	1.8	38	13	0.5	26	30	1800	4	24	180	0.2
39BYG801	1.8	44	13.5	0.3	45	80	3100	4	40	250	0.25

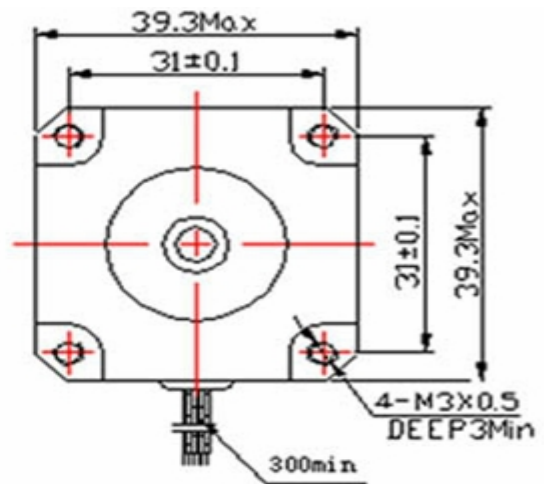

Wiring Diagram (接线图)

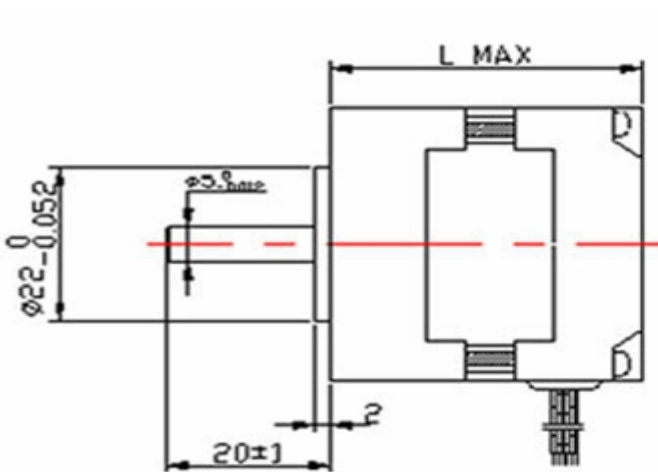