


Step Accuracy-----±5%
 Temperature Rise-----80°C Max.
 Ambient Temperature Range-----20°C ~+50°C
 Insulation Resistance-----100MΩ Min. 50V DC
 Dielectric Strength-----500V AC 1minute

电机型号 Model	步距角 Step angel (°)	机身長 Motor Length L (mm)	相电压 Rate Voltage (V)	相电流 Rate Current (A)	相电阻 Phase Resistance (Ω)	相电感 Phase Inductance (mH)	静力矩 Holding Torque (g. cm)	引线数 Lead Wire (NO.)	转动惯量 Rotor Inertia (g. cm ²)	定位力矩 Detent Torque (g. cm)	重量 Motor Weight (kg)
42BYGH201	1.8	34	12	0.16	75	42	950	5	34	200	0.2
42BYGH202	1.8	34	12	0.3	40	22	1250	6	34	200	0.2
42BYGH610	1.8	40	6.5	1.2	6	13	3000	4	54	220	0.24
42BYGH613	1.8	40	2.4	1.7	1.5	2.5	3500	4	54	220	0.24
42BYGH616	1.8	40	4.1	0.5	8	15	2600	4	54	220	0.24
42BYGH718	1.8	44	8.9	0.5	18	23	2900	6	50	250	0.3
42BYGH721	1.8	44	10	0.25	40	36	2000	6	50	250	0.3
42BYGH722	1.8	44	11.8	0.38	31	32	3200	6	50	250	0.3
42BYGH801	1.8	48	12	0.4	30	28	3800	6	68	280	0.34
42BYGH803	1.8	48	5.6	0.8	7	4	2600	6	68	280	0.34



Wiring Diagram (接线图)

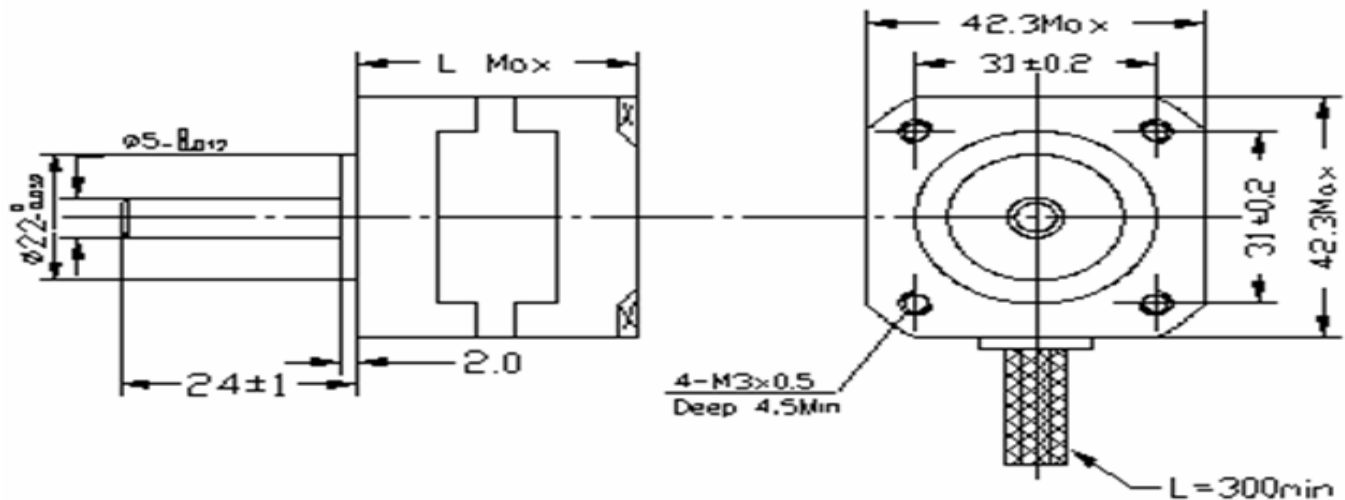