
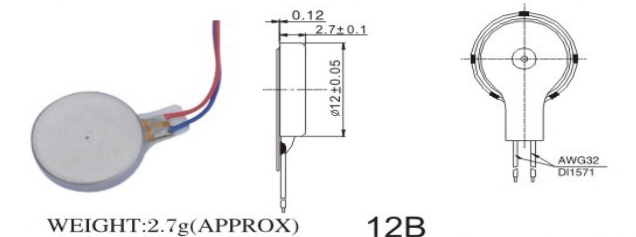
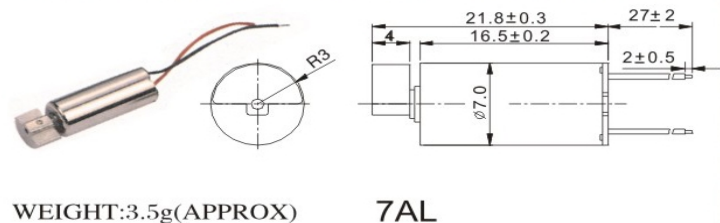
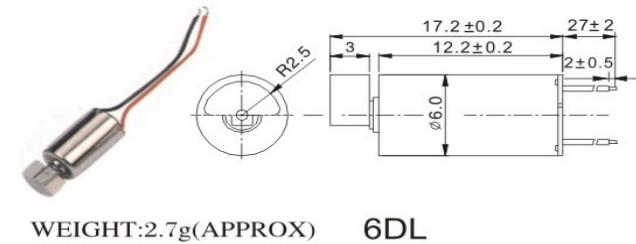
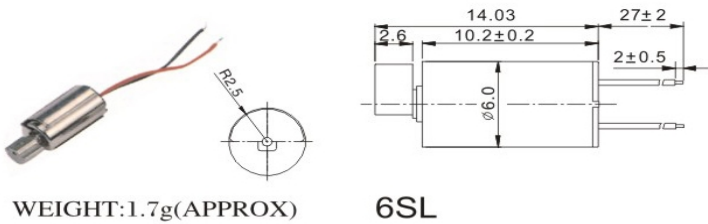
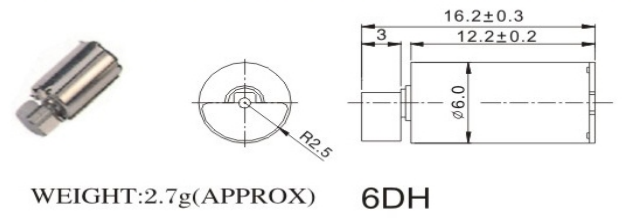
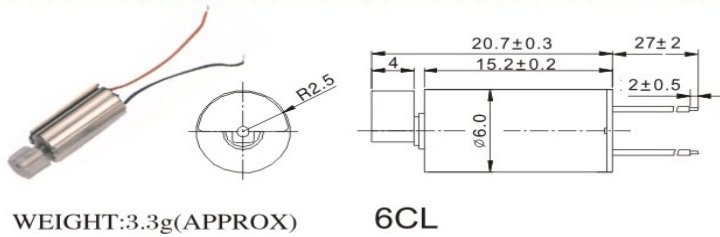
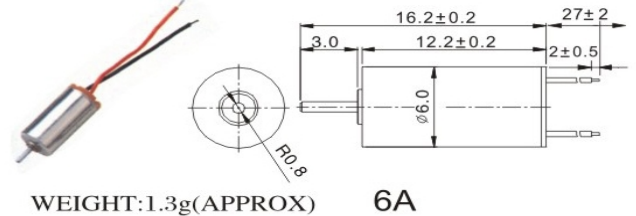


电机型号	额定电压	启动电压	使用电压范围	启动电流	额定电流	回转数	耐电压	机械噪音(1)	动转寿命(2)
MODEL	Rated voltage	Starting voltage	Operating voltage	Starting current	Rated load current	Rated load speed	Voltage resistance	Mechanical noise	Operation life
	V(DC)	V(DC)	V(DC)	mA	mA	rpm	V(DC)	db	(Cycle)
4CL	1.3	≤0.7	0.7-1.6	≤150	75	9000±1500	250	<50	≥200000
6A	1.3	≤0.8	1.0-1.9	≤150	75	19850±1500	250	<50	≥200000
6CL	1.3	≤0.7	0.7-1.6	≤150	75	8000±1500	250	<50	≥200000
6DH	1.3	≤0.7	0.7-1.6	≤150	75	8000±1500	250	<50	≥200000
6SL	1.3	≤0.7	0.7-1.6	≤150	75	8000±1500	250	<50	≥200000
6DL	1.3	≤0.8	0.8-1.6	≤150	75	9000±1500	250	<50	≥200000
7AL	1.3	≤0.7	0.7-1.6	≤150	75	7000±1500	250	<50	≥200000
12B	1.3	≤1.5	1.6-3.6	≤150	75	7200±1500	250	<50	≥200000

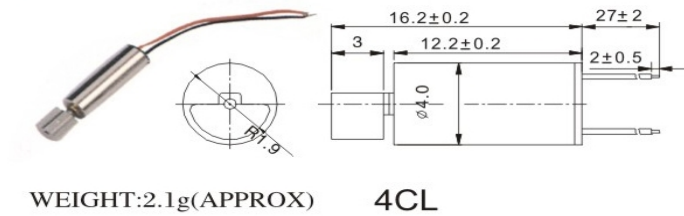

Remarks :

- (1) At rated voltage and ambient noise:28 db (Max).
- (2) Test mode: 2 seconds on ,2 seconds off,as one cycle.
- (3) The above parameters are just parts of our products we can design according to your special requirements.