


Model	Rated Voltage (v)	Rated Frequency (Hz)	Rated Speed (r/min)	Input Current (mA)	Input Power (w)	Pull-in Torque (kgf. cm)	Starting Voltage (v)	Temperature Rise (K)	Noise (dB)
50SM16	110/120	50/60	5/6	≤40	≤3.5	≥2.16	≤96	≤60	≤40
50SM16	110/120	50/60	4/5	≤40	≤3.5	≥2.5	≤96	≤60	≤40
50SM16	110/120	50/60	2.5/3	≤40	≤3.5	≥4	≤96	≤60	≤40
50SM16	220/240	50/60	5/6	≤20	≤3.5	≥2.16	≤176	≤60	≤40
50SM16	220/240	50/60	4/5	≤20	≤3.5	≥2.5	≤176	≤60	≤40
50SM16	220/240	50/60	2.5/3	≤20	≤3.5	≥4	≤176	≤60	≤40

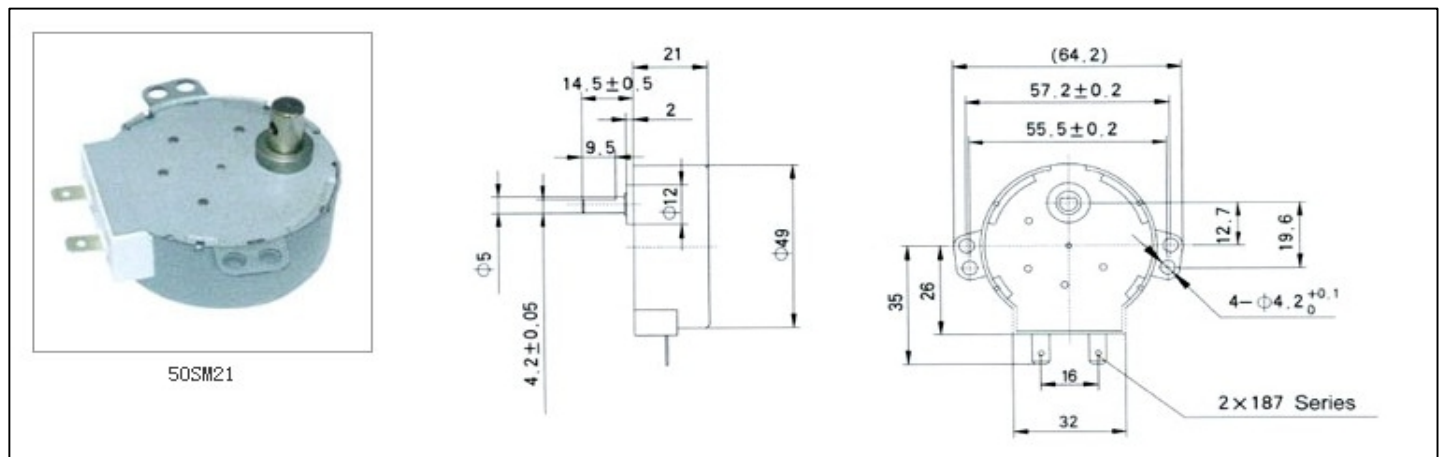

Model	Rated Voltage (V)	Rated Frequency (Hz)	Rated Speed (r/min)	Input Current (mA)	Input Power (W)	Pull-in Torque (kgf. cm)	Starting Voltage (V)	Temperature Rise (K)	Noise dB (A)	Insulation Class
50SM21	110/120	50/60	5/6	≤40	≤4	≥4	≤96	≤60	≤40	E
50SM21	110/120	50/60	4/5	≤40	≤4	≥5	≤96	≤60	≤40	E
50SM21	220/240	50/60	5/6	≤20	≤4	≥4	≤176	≤60	≤40	E
50SM21	220/240	50/60	4/5	≤20	≤4	≥5	≤176	≤60	≤40	E
50SM21	220	50	1/6	≤20	≤4	≥5	≤176	≤60	≤40	E

Remarks: the above dimensions and function parameters are just parts of our products. We can do OEM and ODM.