




| Model      | Voltage         |         | No Load |         | At Maximum Efficiency |         |        |       | Stall  |        |        |         |
|------------|-----------------|---------|---------|---------|-----------------------|---------|--------|-------|--------|--------|--------|---------|
|            | Operating Range | Nominal | Speed   | Current | Speed                 | Current | Torque |       | Output | Torque |        | Current |
|            |                 |         | RPM     | A       | RPM                   | A       | g.cm   | mN.m  | W      | g.cm   | mN.m   | A       |
| LDM-37GM-A | 3~12VDC         | 12.0VDC | 50      | 0.08    | 40                    | 0.3     | 2400   | 235.2 | 1      | 12000  | 1176.4 | 1.5     |
| LDM-37GM-A | 6~24VDC         | 24.0VDC | 20      | 0.1     | 16                    | 0.4     | 9200   | 901.9 | 1.52   | 46000  | 4510   | 2.0     |

**Drawing**

LDM-37GM-A

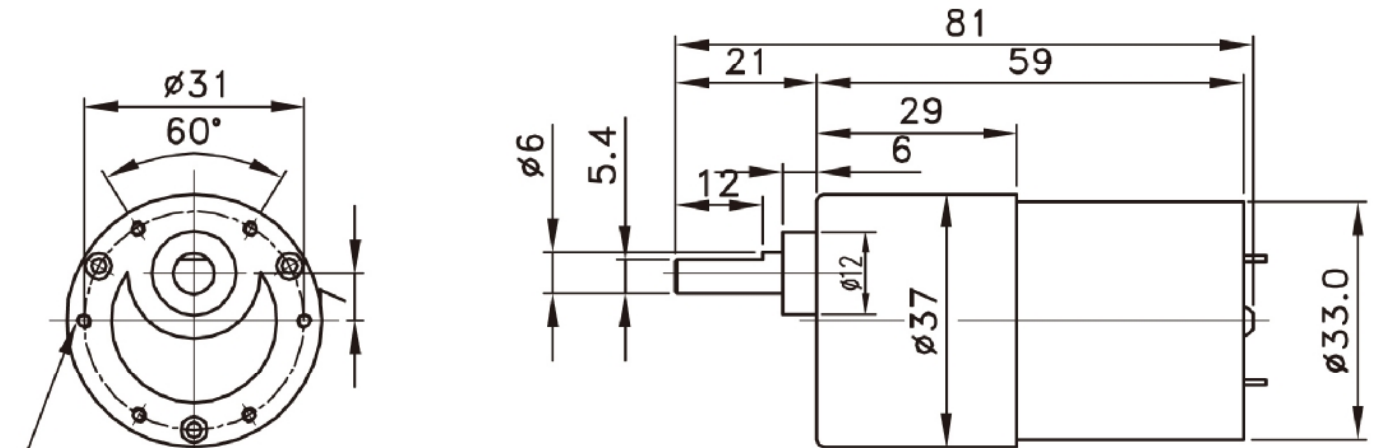


WEIGHT:183.4g(APPROX)

上述尺寸单位:mm

**Performance Curve**

LDM-37GM-A

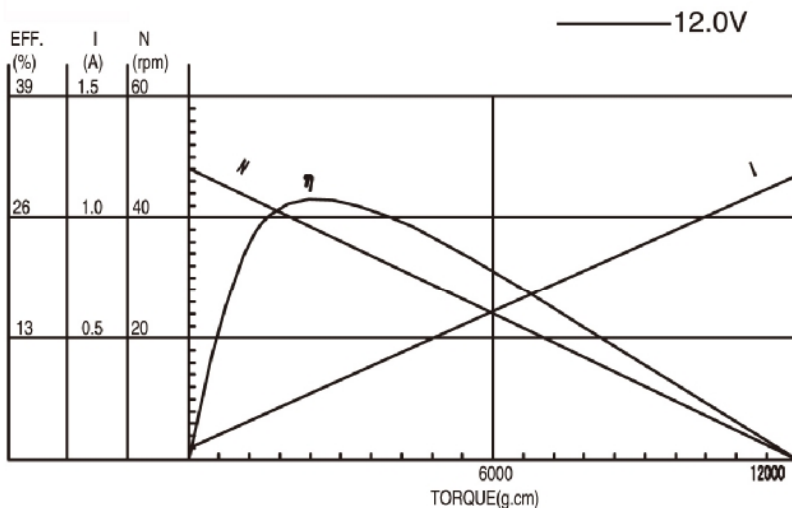

**Description**

Application:

automation equipment, Shredder, automatic door, vending machine, motorized curtains, ATM machines.

典型应用

自动化设备, 碎纸机, 自动门, 贩卖机, 自动窗帘, ATM机等

P. S. :

The above motor performance is only for reference purposes. We can design the motors according to customers' requirements of specific motor parameters, shaft length, lifetime etc.

备注:

上述电机性能仅供参考, 具体电机性能参数, 轴长, 寿命要求, 各项认证要求可根据客户的实际要求进行设计。